





P/V Vent Valve **C8011**

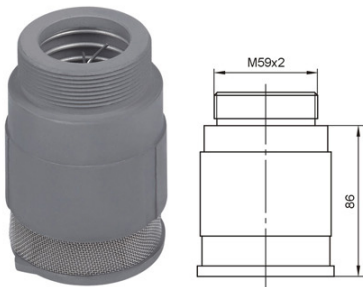

P/V Vent Valve **C801T1**

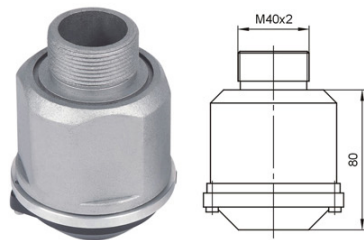

P/V Vent Valve **C8011A**



P/V Vent is installed on the top of the Tanker to ensure the safety during transportation. The design is according to the GB/T 18564.1-2006. With the functions of Anti-flow when the tanker is over rolled and high sensitivity to inlet or exhaust air. It is suitable for diesel, gasoline and kerosene and other light fuel. According to installment mode, there are internal P/V vent and external P/V vent.

Technical Data

Material	Aluminum ally
Outlet opening pressure	+6~+8KPa
Inlet opening pressure	-2~-3KPa
Flow rate	600L/min

Benefit and Features

- **No Leakage When Over Rolled**
When the tanker over rolled at the certain angle, it will automatically full closed to prevent the inside fuel spills out.
- **Superior Work**
High precision spring makes it work more accurately.

External P/V Vent Valve

Anti-Flow Fire-Blocked P/V Vent



C8014

Flanged P/V Vent



HXF01F

Inside Threaded P/V Vent



HXF02L

Threaded P/V Vent



HXF03L