


SS API Adaptor Valve H806D-100

NEW

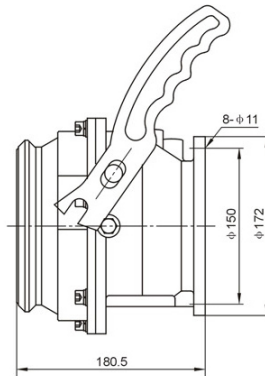

API Adaptor Valve is installed on one side of bottom tanker, with the design of quick connecting structure. Interface dimension is designed according to the standard of API RP 1004. It is important component of the bottom loading system to get quick detachment without leakage, ensuring much safer and reliable when loading and discharge. It is suitable for loading and unloading of corrosive chemicals and the material is can be carbon steel or 316 stainless steel according to demand.

Benefit and Features

- High corrosion-Resistance**
 The whole valve body is made of Stainless Steel to ensure the corrosion-resistance.
- Superior Sealing**
 Normally with FKM sealing gasket and can use PTFE sealing gaskets to ensures the large usage of the valve.
- Second Gear Open**
 There are two gear open on the handle to set the flow rate according to demand.
- New Structure**
 The whole valve body is made of new type of lift-draw style Structure to ensure the high precision and high sealing
- Easy-Maintenance**
 Allows the sealing gasket to be replaced without removing the valve from the tank pipework.

Technical Data

Nominal diameter	4"
Working pressure	0.6MPa
Max flow rate	2500L/min
Open method	Mechanical
Temperature range	-20~+120°C

SS API Gravity Drop Coupler H8061-65/80/100

NEW



SS Dust Cap H8062CL

NEW

